

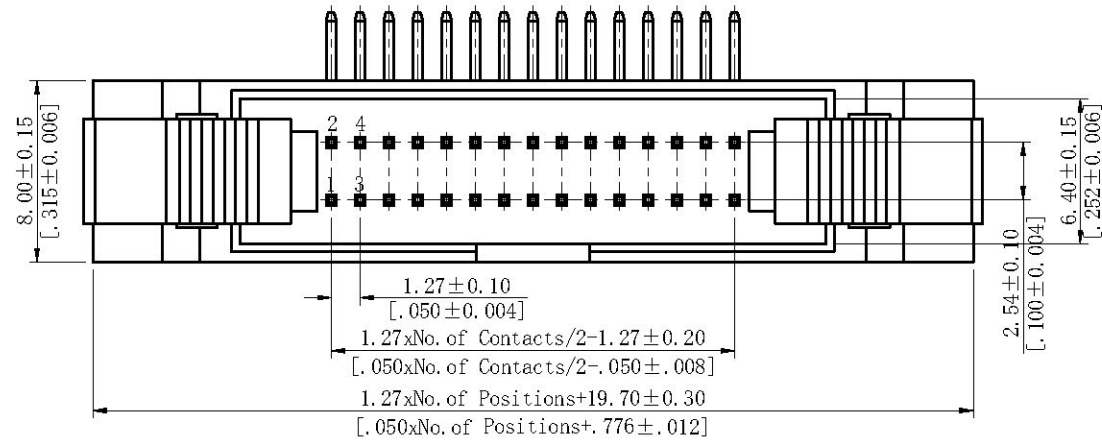


REV	REVISION	NAME	DATE

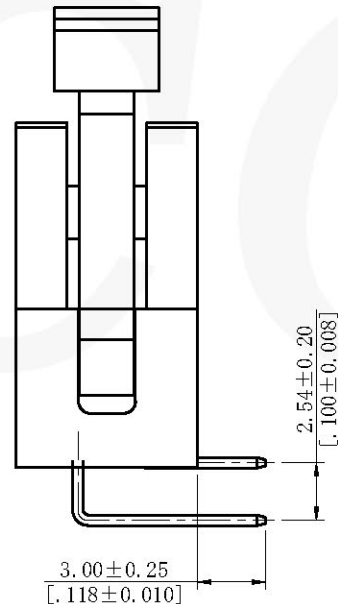


**Electrical:**  
 Current Rating: 1.0AMP  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 500V AC/DC  
**Mechanical:**  
 Contact Material: Brass (SQ 0.46mm)  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester UL94V-0  
 Standard: PA6T  
**Environmental:**  
 Operating Temp Range: -40°C ~ +105°C  
 Max. Processing Temp: +230°C for 30~60 Seconds  
 +260°C for 10 Seconds

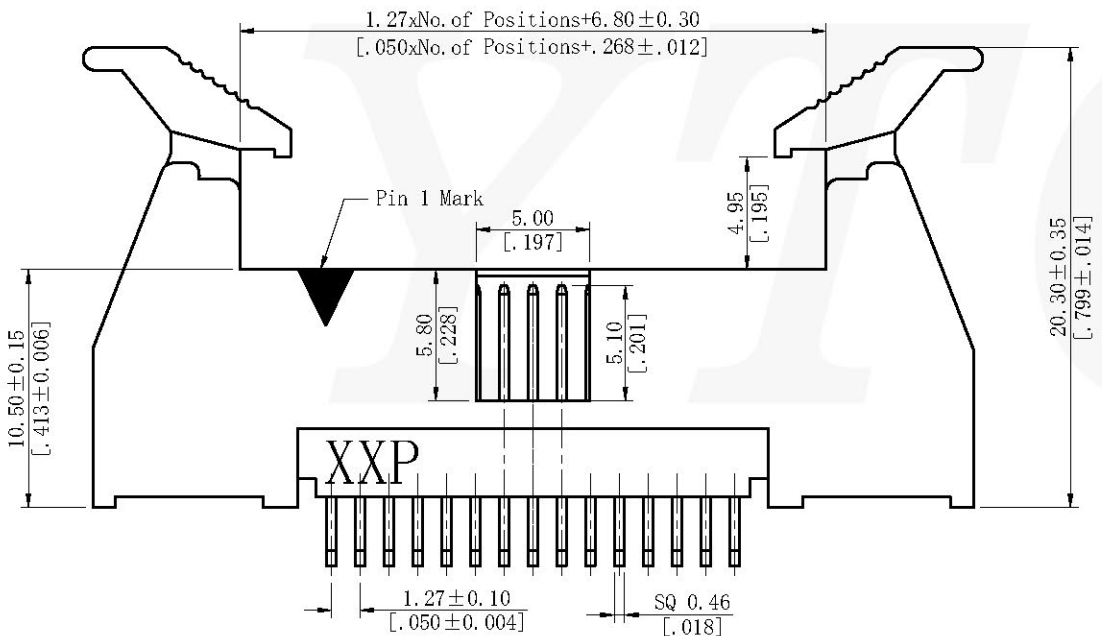


**Ordering Code:**  
 3240-XX R XX X S T 01

No. of Pins	Contact Plating	Insulator Material
10=10P 34=34P	C0=Gold Flash	A=BK-PBT
14=14P 40=40P	C1=3u" Gold	B=BK-PA6T
16=16P 44=44P	C2=5u" Gold	C=BK-PA9T
20=20P 50=50P	C3=10U" Gold	D=BK-LCP
24=24P 60=60P	C4=15U" Gold	G=CY-PBT
26=26P 64=64P	C5=30U" Gold	H=CY-PA6T
30=30P 80=80P	S0=GoldFlash/Tin	
32=32P 100=100P	SN=Tin	
	SM=Matte tin	

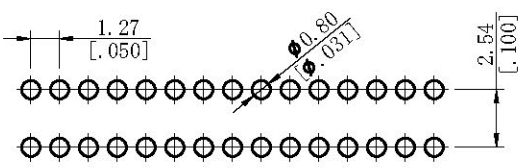

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE ± 0.05)



THIS DRAWING IS A CONTROLLED DOCUMENT

TOLERANCES UNLESS OTHERWISE SPECIFIED		UNITS	SCALE	SIZE
0 PLC ± —	1 PLC ± 0.30/.012	mm/inch	FIT	A4
2 PLC ± 0.25/.010	3 PLC ± 0.20/.008			
4 PLC ± 0.10/.004	ANGLES ± 3°			

YTCO TECHNOLOGY HTTP://WWW.YTCO.CO E-MAIL:SALES@YTCO.CO	
TITLE	EJECTOR HEADER, 1.27X2.54MM PITCH, R/A
PART NO.	3240-XXRXXXSX01
DRAWING NO.	3240-R
FILE PATH	A/D/YTCOTZ/Ejector Header/1.27x2.54mm
SHEET	1 OF 1
REV	A

ITEM	Mating	Part No.
Standard	5141	3240-XXRGOBST01
Alternate		