




RoHS COMPLIANT

* DUE TO TECHNICAL PROGRESS, ALL THE INFORMATION PROVIDED IS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV	REVISION	NAME	DATE

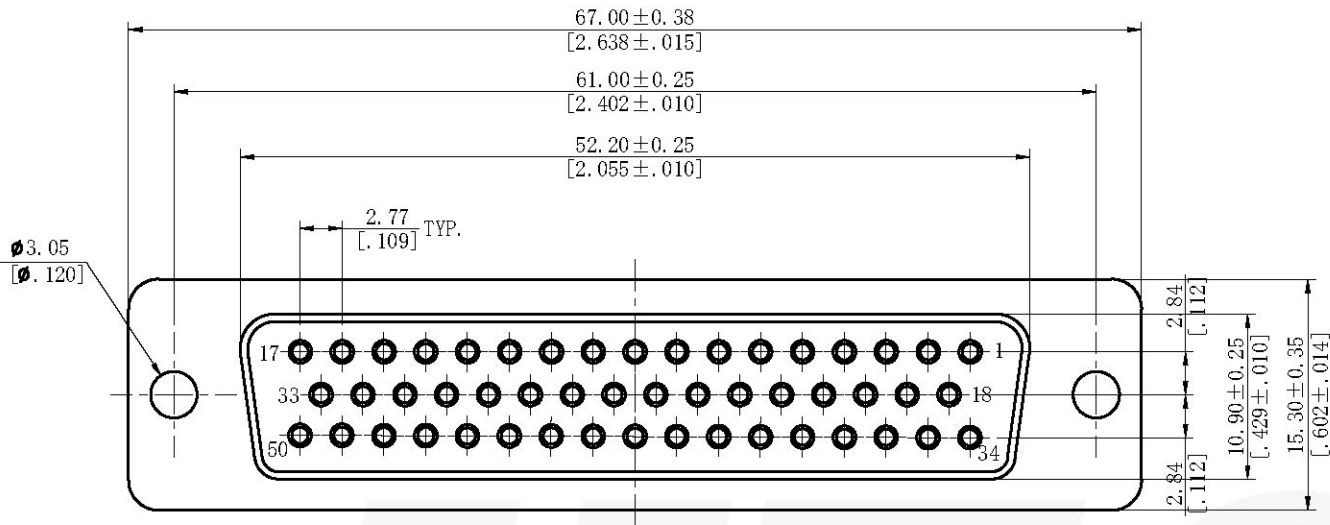

Electrical:
 Current Rating:3.00AMP
 Contact Resistance:20mΩ Max
 Insulation Resistance:1000MΩ Min
 Dielectric Withstanding Voltage:500V AC for 1 Minute
Mechanical:
 Insulator:PBT+30% Glass Filled Polyester UL94V-0
 Contact:Copper Alloy
 Contact Plating:Au or Sn over Ni
 Shell:Steel, Nickel Plated
 Fork:Copper Alloy, Tin over Ni Plated
 Screw:Steel Or Copper Alloy, Nickel Plated
 Nut:Steel Or Copper Alloy, Nickel Plated
Environmental:
 Operating Temp Range:-55°C~+105°C

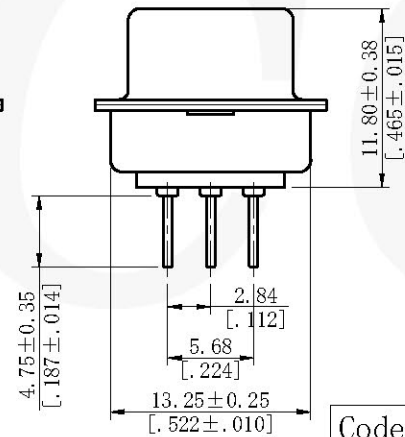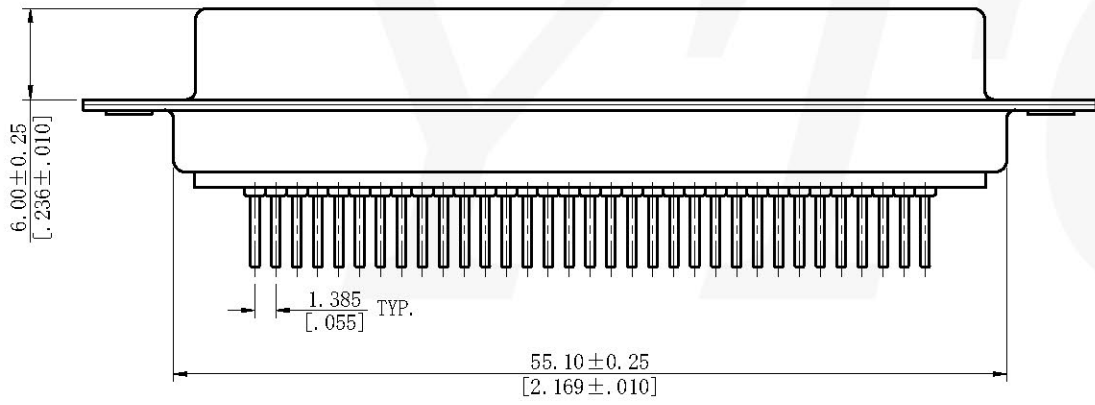


Ordering Code:
 6021-50F X XX X A 01

Mounting Style 0=Without Fork Without Nut 5=With Front Nut 6=With Back Nut 7=With Back Fork 8=With Back Fork With Screw	Contact Plating C0=Gold Flash S0=GoldFlash/Tin S1=3u" Gold/Tin S2=5u" Gold/Tin S3=10u"Gold/Tin S4=15u"Gold/Tin S5=30u"Gold/Tin	Color Insulator B=Black W=White U=Blue
---	--	--

NAME	DIM "L"				
NUT	3.00 (.118)	4.00 (.157)	4.80 (.189)	6.00 (.236)	6.50 (.256)

Code	0	5	6	7	8
Mounting Style					

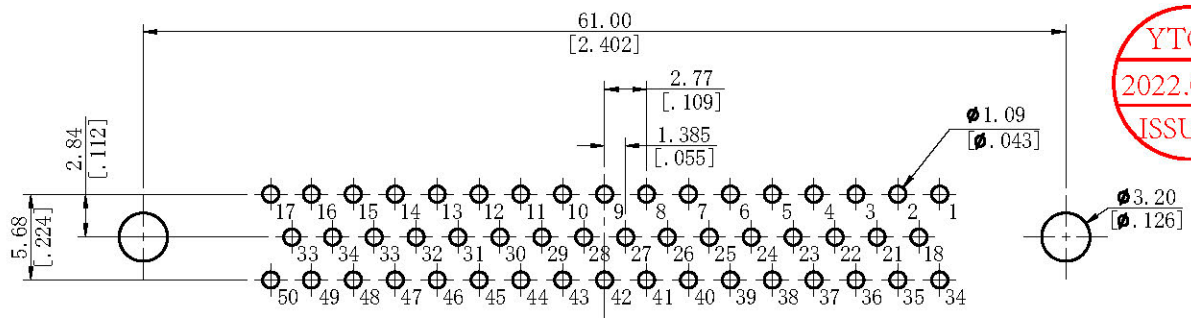

Recommended P. C. B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)

YTCO
 2022.07.29
 ISSUED

THIS DRAWING IS A CONTROLLED DOCUMENT

TOLERANCES UNLESS OTHERWISE SPECIFIED

UNITS	SCALE	STZE
mm/inch	FIT	A4
DRAWN BY	DATE	TITLE
Xu	7/29/2022	D-SUB FEMALE STRAIGHT DIP BOARD MOUNT
ENGINEER	DATE	PART NO.
Zhang	7/29/2022	6021-50FXXXXA01
CHECKED BY	DATE	DRAWING NO.
Mike	7/29/2022	6021
APPROVED BY	DATE	FILE PATH
Andy	7/29/2022	A/D/YTCOTZ/D-SUB/DP
PROJ.	FACE CODE	SHEET
594309442		1 OF 1

YTCO TECHNOLOGY
 HTTP://WWW.YTCO.CO E-MAIL:SALES@YTCO.CO

D
C
B
A

D
C
B
A