
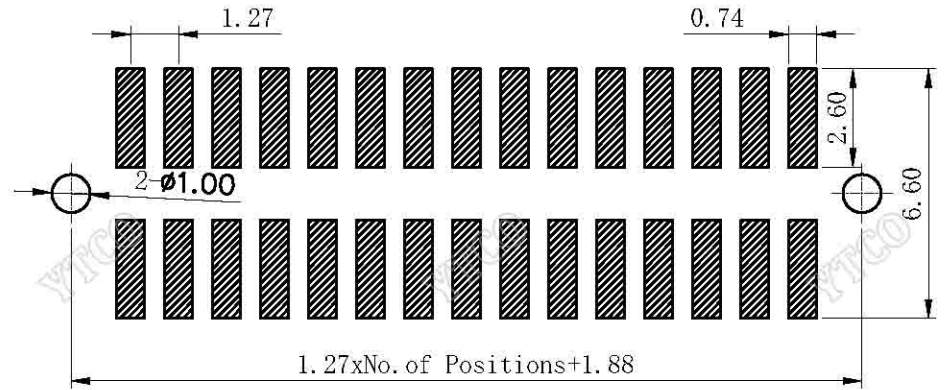

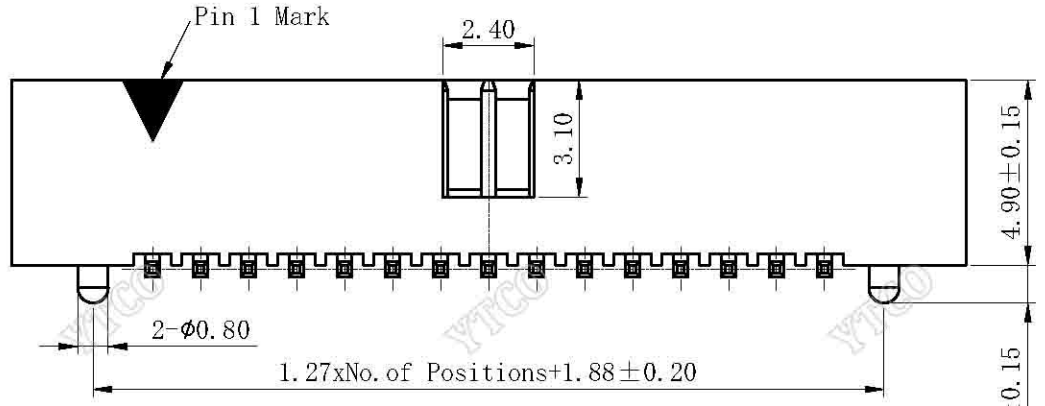



RoHS Compliant

*Due To Technical Progress, All The Information Provided Is Subject To Change Without Prior Notice.

Rev No	Revision note	Date	Signature	Checked
A/0	NEW DRAWING	DEC. 07. 2020		

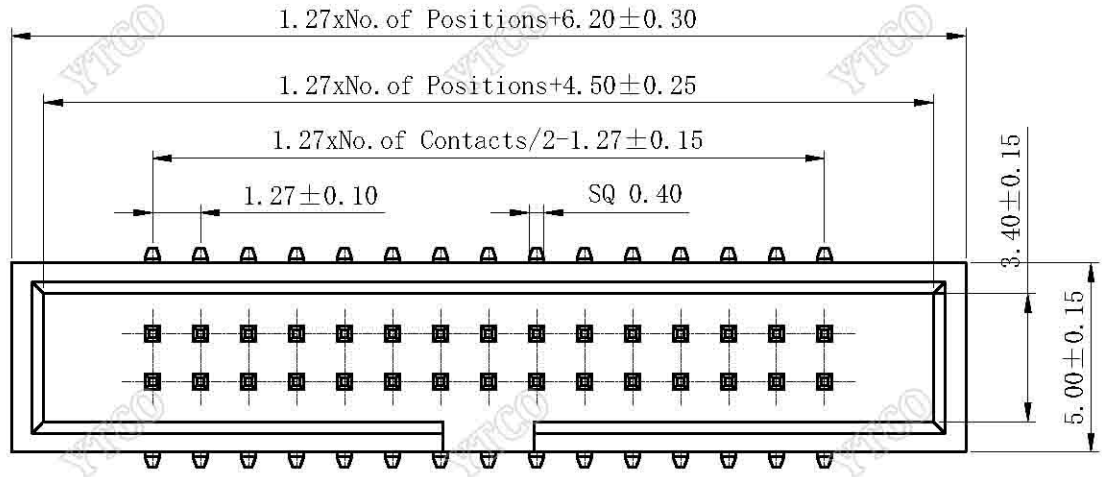

Recommended P. C. B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Electrical:
 Current Rating: 1.0AMP.
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 500V AC/DC.

Mechanical:
 Contact Material: Brass (SQ 0.40mm).
 Contact Plating: Au or Sn Over Ni.
 Insulator Material: Polyester UL94V-0.
 Standard: PA6T.

Environmental:
 Operating Temp Range: -40°C ~ +105°C.
 Max. Processing Temp: +230°C for 30~60 Seconds.
 +260°C for 10 Seconds

Ordering Code:

3030-XX M XX X 000 X XX

No. of Pins	Contact Plating	Insulator Material	Packing	Type
10=10P 34=34P 14=14P 40=40P 16=16P 44=44P 20=20P 50=50P 24=24P 60=60P 26=26P 64=64P 30=30P 80=80P 32=32P 100=100P	G0=Gold Flash G1=3u" Gold G2=5u" Gold G3=10u" Gold G4=15u" Gold G5=30u" Gold S0=GoldFlash/Tin SN=Tin SM=Matte tin	A=BK-PBT B=BK-PA6T C=BK-PA9T D=BK-LCP G=GY-PBT H=GY-PA6T	A=Tray T=Tube P=Tube+CAP R=Tape& Reel+CAP	01=Type 1 02=Type 2

ITEM	W(dimension)	Part No.	Mating
Standard	5.80	3030-XXMGOB000T01	5131
Alternate			

THIS DRAWING IS A CONTROLLED DOCUMENT

DRW: KAI XUAN XU DATE: DEC. 07. 2020

CHK: MIKE DATE: DEC. 07. 2020

APVD: PETER DATE: DEC. 07. 2020

UNITS: MM SCALE: 5 : 1 SIZE: A4

CAGE CODE: 594309442 FILE PATH: A/D/YTCOTZ/Box Header/1.27mm SHEET: 1 OF 1 REV: A

YTCO TECHNOLOGY
HTTP://WWW.YTCO.CO

TITLE: BOX HEADER, 1.27MM PITCH, SMT, H=4.90

PART NO.: 3030-XXMXXX000XXX

DRAWING NO.: 3030-M