


RoHS Compliant

\*Due To Technical Progress, All The Information Provided Is Subject To Change Without Prior Notice.

Rev No	Revision note	Date	Signature	Checked
A/0	NEW DRAWING	DEC. 07. 2020		

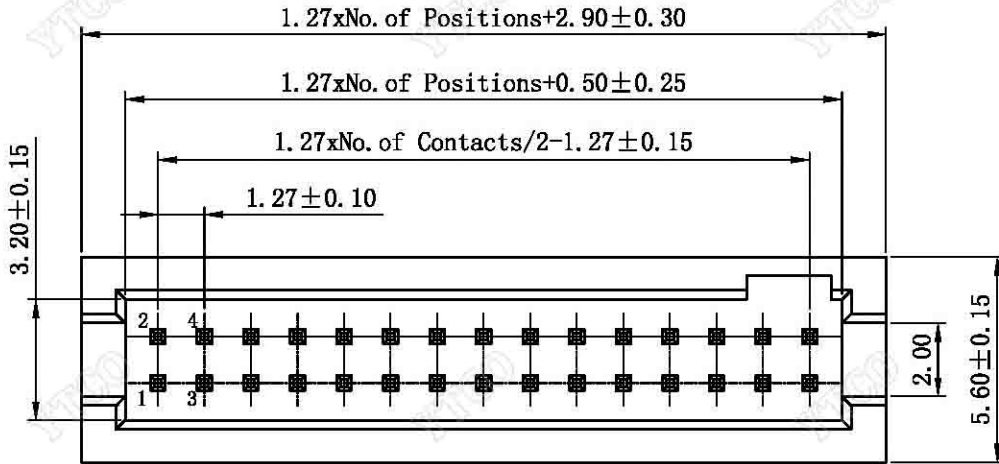

**Electrical:**



Current Rating:1.0AMP.  
 Contact Resistance:20mΩ Max.  
 Insulation Resistance:1000MΩ Min.  
 Withstanding Voltage:500V AC/DC.

**Mechanical:**

Contact Material:Brass(SQ 0.40mm) .  
 Contact Plating:Au or Sn Over Ni.  
 Insulator Material:Polyester UL94V-0.  
 Standard:PA6T.

**Environmental:**


Operating Temp Range:-40℃~-+105℃.  
 Max.Processing Temp:+230℃ for 30~60 Seconds.  
 +260℃ for 10 Seconds

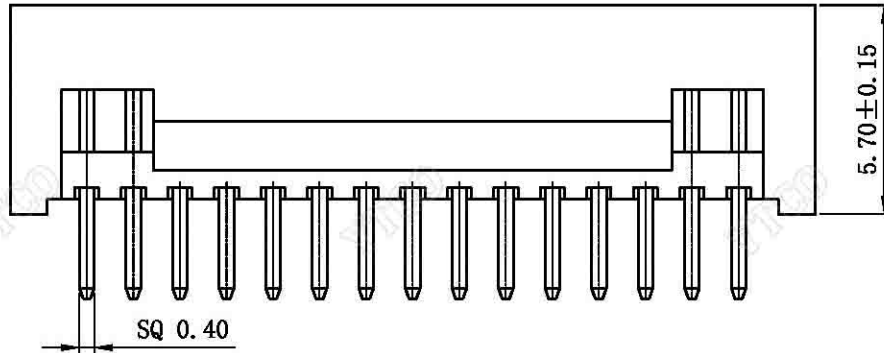

**Ordering Code:**

3032-XX S XX X 000 X 01

No. of Pins	Contact Plating	Insulator Material	Packing
06-6P 34-34P 08-8P 40-40P 10-10P 44-44P 14-14P 50-50P 20-20P 60-60P 24-24P 64-64P 26-26P 80-80P 30-30P 100-100P 32-32P	G0=Gold Flash G1=3u" Gold C2=5u" Gold C3=10u"Gold G4=15u"Gold G5=30u"Gold S0=GoldFlash/Tin SN=Tin SM=Matte tin	A=BK-PBT B=BK-PA6T C=BK-PA9T D=BK-LCP G-CY-PBT H-CY-PA6T	A=Tray T=Tube

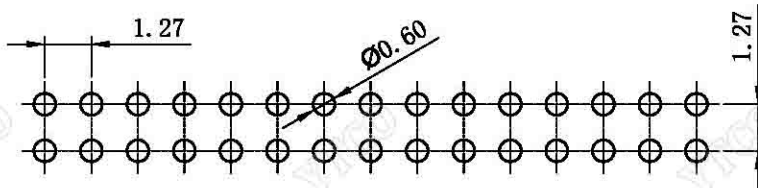

Recommended P. C. B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

ITEM	C(dimension)	Part No.	Mating
Standard	2.30	3032-XXSG0B000T01	2343
Alternate			

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN DATE KAIKUAN, XU DEC. 07. 2020	 YTCO TECHNOLOGY HTTP://WWW.YTCO.CO
DIMENSIONS INCHES		CHK DATE MIKE DEC. 07. 2020	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD DATE PETER DEC. 07. 2020	TITLE BOX HEADER, 1.27MM PITCH, S/T, H=5.70
0 PLC ± — 1 PLC ± 0.40 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± 0.10 ANGLES ± 3°		UNITS SCALE SIZE MM 5 : 1 A4	PART NO. 3032-XXSXXX000X01
		CAGE CODE FILE PATH 594309442 A/D/YTCOTZ/Box Header/1.27mm	DRAWING NO. 3032-S
		1 OF 1	REV A