
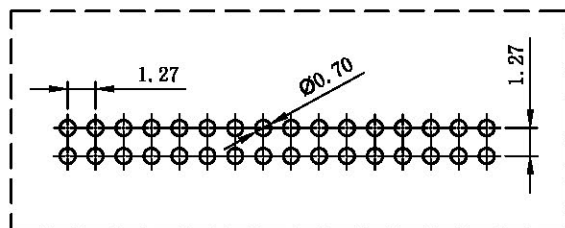

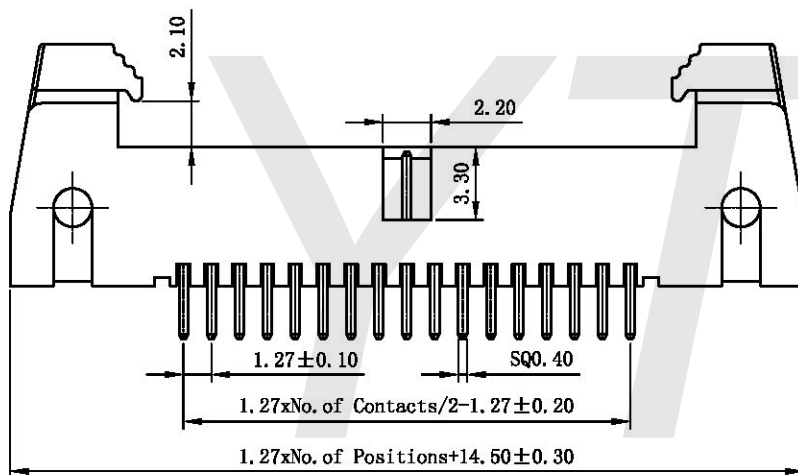


RoHS Compliant

*Due To Technical Progress, All The Information Provided Is Subject To Change Without Prior Notice.

Rev No	Revision note	Date	Signature	Checked
A/0	NEW DRAWING	DEC. 07. 2020		

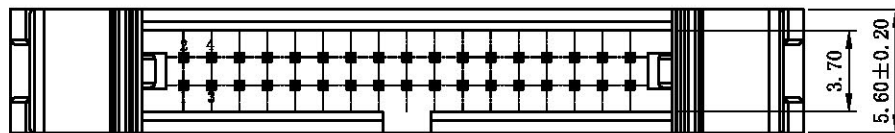

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

Electrical:

Current Rating: 1.0AMP.
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/DC.

Mechanical:

Contact Material: Brass (SQ 0.40mm).
Contact Plating: Au or Sn Over Ni.
Insulator Material: Polyester UL94V-0.
Standard: PA6T.

Environmental:

Operating Temp Range: -40°C ~ +105°C.
Max. Processing Temp: +230°C for 30~60 Seconds.
+260°C for 10 Seconds

Ordering Code:

3230-XX S XX X S T 01

No. of Pins	Contact Plating	Insulator Material
06=6P	G0=Gold Flash	A=BK-PBT
08=8P	G1=3u" Gold	B=BK-PA6T
10=10P	G2=5u" Gold	C=BK-PA9T
12=12P	G3=10u" Gold	D=BK-LCP
14=14P	G4=15u" Gold	G=GY-PBT
16=16P	G5=30u" Gold	H=GY-PA6T
18=18P	S0=GoldFlash/Tin	
20=20P	SN=Tin	
24=24P	SM=Matte tin	

ITEM	C(dimension)	Part No. (Standard)	Mating
Standard	2.40	3230-XXSGBST01	5131
Alternate			

THIS DRAWING IS A CONTROLLED DOCUMENT		DWN KAI XUAN XU	DATE DEC. 07. 2020
DIMENSIONS INCHES		CHK MIKE	DATE DEC. 07. 2020
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD PETER	DATE DEC. 07. 2020
0 PLC ±		UNITS MM	SCALE 3 : 1
1 PLC ± 0.40		SIZE A4	
2 PLC ± 0.25		CAGE CODE 594309442	FILE PATH A/D/YTCOTZ/Ejector Header/1.27mm
3 PLC ± 0.15			
4 PLC ± 0.10			
ANGLES ± 3°			
		YTCO TECHNOLOGY HTTP://WWW.YTCO.CO	
		Ejector Header, 1.27MM PITCH, 180° DIP	
		PART NO. 3230-XXSXXXST01	
		DRAWING NO. 3230-S	
		1 OF 1	